
A4说明书 80克双胶纸
正反面黑色印刷

PHILIPS


Projectline


WP

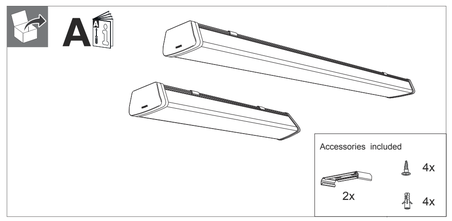

220V 240V | 50Hz 60Hz | LEDs | Max. 35 °C Min. -10 °C | 15,000

Type	System lumen (Lm)	CCT	P(W)	Energy efficiency class of light source	L	kg
Projectline WP W12L58 2200lm 2700K	2200	2700K	24W	F	575	0.75
Projectline WP W12L58 2350lm 4000K	2350	4000K	24W	F	575	0.75
Projectline WP W12L118 5000lm 2700K	5000	2700K	50W	F	1175	1.33
Projectline WP W12L118 5300lm 4000K	5300	4000K	50W	F	1175	1.33







Wiring:


The IP rating of cable connector or junction box shall be IP65 or above. (Not included)

Luminaire Cable: 60245IEC57 2x1.0mm², round cable (Not included)










© Philips Projectline batten 2022

Data subject to change without notice

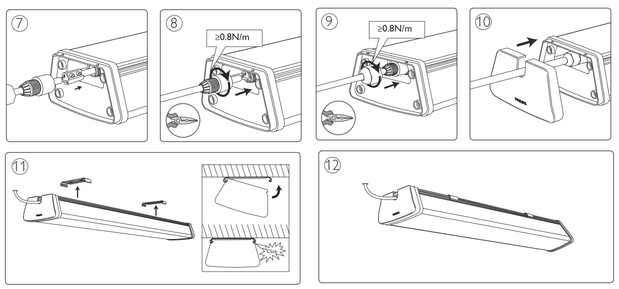

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The LED driver is not serviceable and not replaceable.
- The light source of this luminaire is not replaceable;when the light source reaches its end of life， the whole luminaire shall be replaced.
- Luminaire must not be used or stored in corrosive environments where hazardous materials such as sulphur,chlorine,phthalates,etc,are present.

ATTENTION
OBSERVE PRECAUTIONS FOR HANDLING
ELECTROSTATIC SENSITIVE DEVICES

