


PHILIPS

Capricorn
Ultra Efficient
9290047557

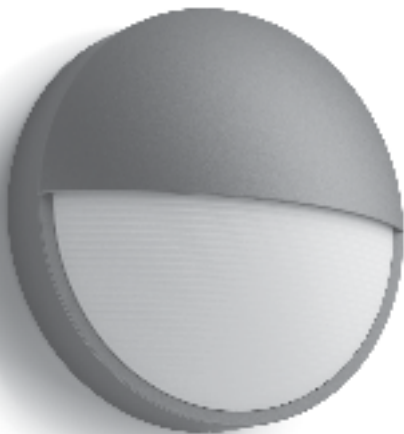


User manual
Benutzerhandbuch
Notice d'emploi
Manual de usuario
Manual do usuário
Manuale d'uso
Gebruiksaanwijzing

Incl.

A



B





x2



x2

ST4.2*30mm

Excl.



B





IP44






3/8"



8mm



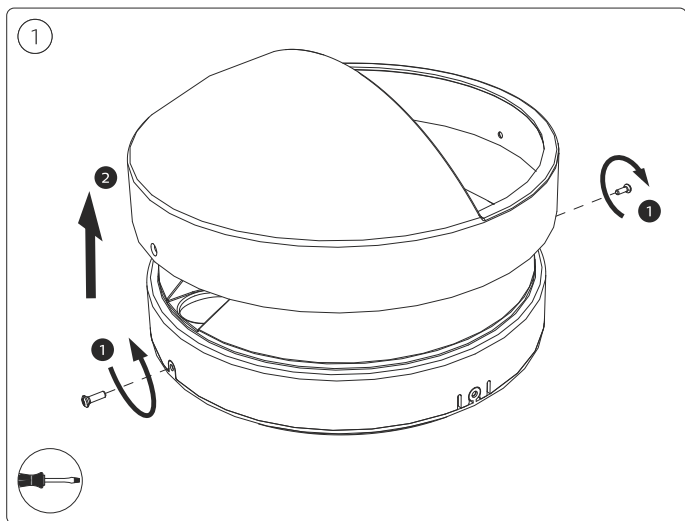





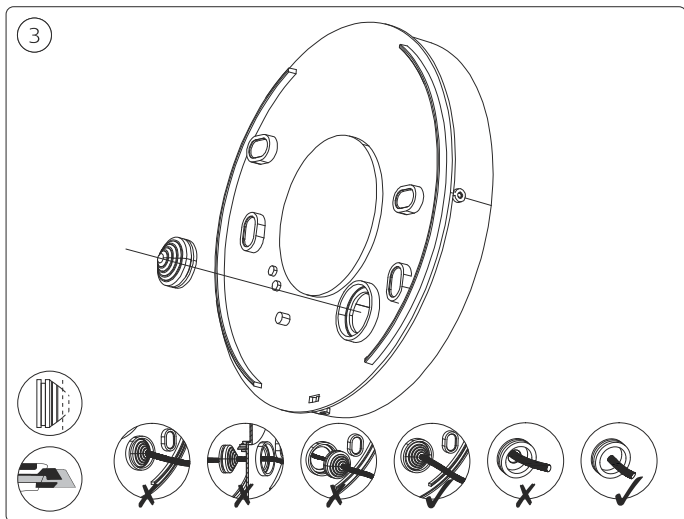


Diagram 5 illustrates the connection of the cable to the terminal block. A screwdriver is shown at the bottom left. The main diagram shows the cable being inserted into the terminal block. An inset shows the cable being pushed into the terminal block. Another inset shows the cable being secured by the terminal block's clamping mechanism.

60245 IEC 57
Min. 2x1.0mm²
Max. 2x1.5mm²

The diagram also includes dimensions for the cable: 18-22 mm for the overall length and 7 mm for the stripped length. The cable is labeled L (Line) and N (Neutral).

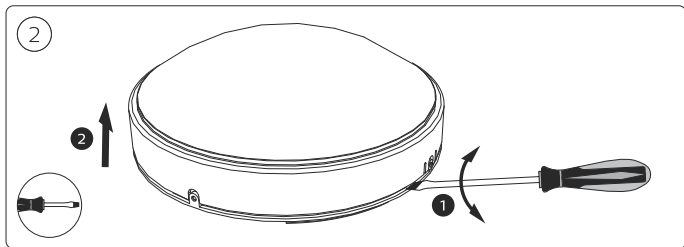

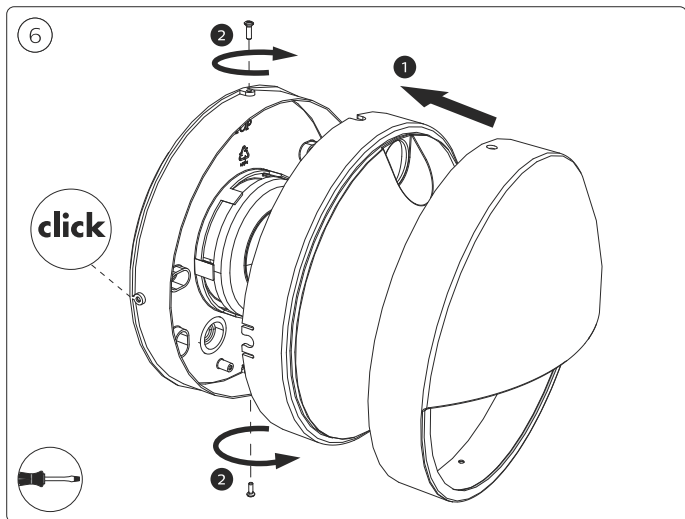

Signify Commercial UK Limited
2 Guildford Business Park,
GU2 8XG

Signify
I.B.R.S. / C.C.R.I. Numéro 10461
5600 VB Eindhoven,
the Netherlands
00800-74454775

© 2025 Signify Holding

 **signify**

3241 663 15831

Philips and the Philips Shield Emblem
are registered trademarks of Koninklijke
Philips N.V. and are used under license

www.philips.com/lighting