


A




rabalux®

78032





X1

⊕ X2 ⊕ X2 ⊕ X4


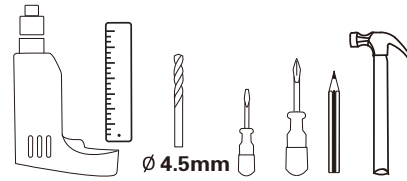


Not included


B1

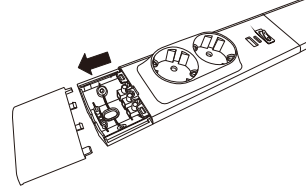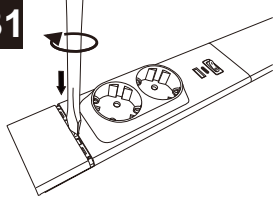





B2

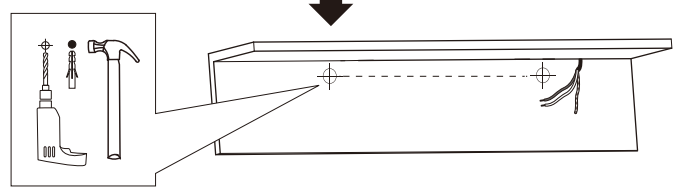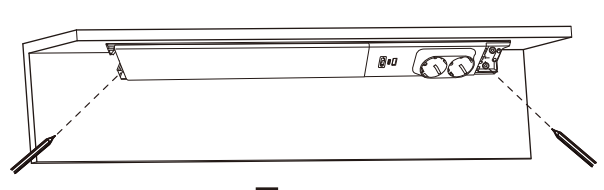






C1

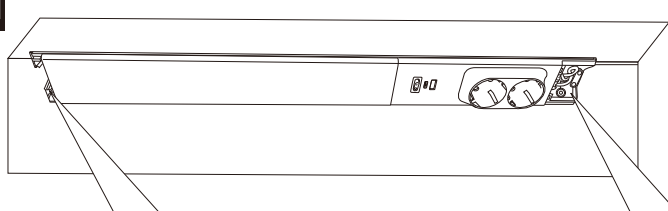

C2

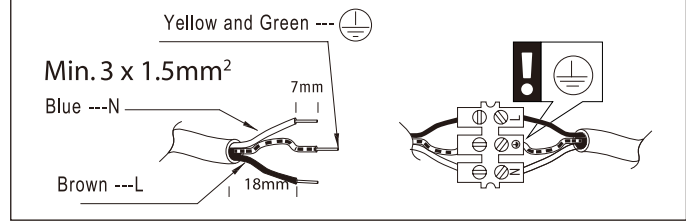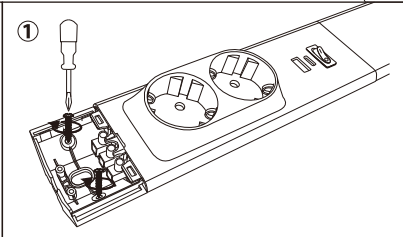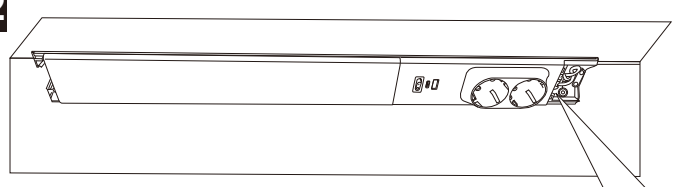

D1

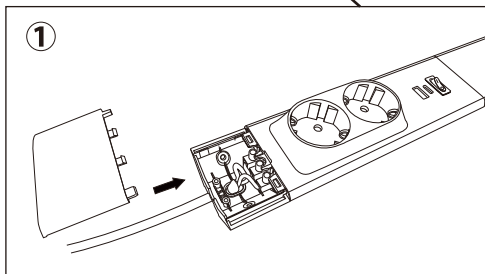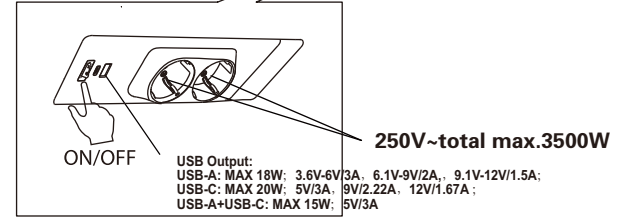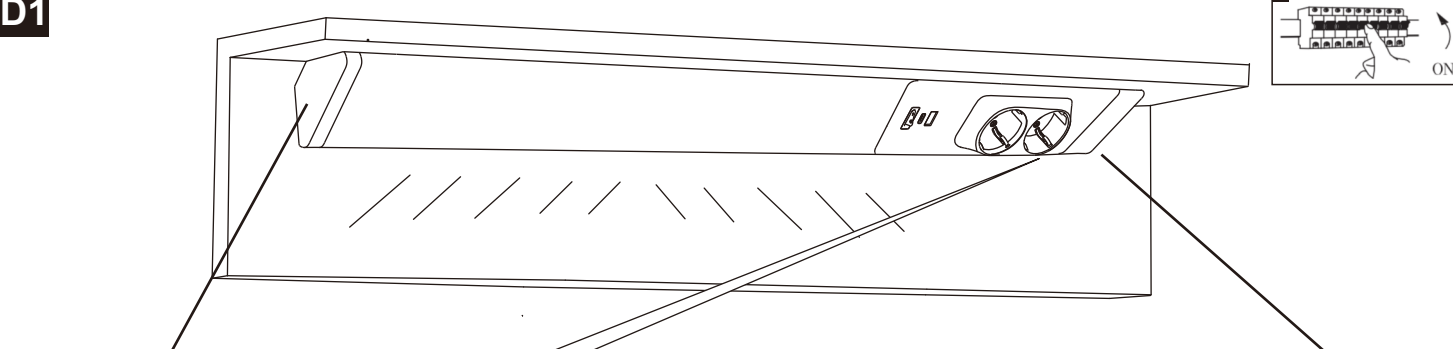

luminaire: 220-240V~ 50/60Hz 18W

USB Output:

USB-A: MAX 18W; 3.6V-6V/3A, 6.1V-9V/2A, 9.1V-12V/1.5A;

USB-C: MAX 20W; 5V/3A, 9V/2.22A, 12V/1.67A;

USB-A+USB-C: MAX 15W; 5V/3A

Charging protocol compatibility

USB_C interface compatibility: PD2.0/3.0, QC3.0, QC2.0, Apple2.4A, DCP-1.5A, Huawei FCP fast charge protocol;

USB_A interface compatibility: Apple2.4A, QC3.0, QC2.0, DCP-1.5A, Samsung AFC quick charge protocol.

2 Socket-Outlets: Max. 3500W 230V~